Leader-High performance

CTH70-12 (12V70AH)

Specification

Article number:460-6115

Nominal Voltage	12V		
Nominal Capacity(10HR)	70Ah		
Dimensions	Length	348mm	(13.7 inches)
	Width	167mm	(6.57 inches)
	Container Height	178mm	(7.01 inches)
	Total Height (with Terminal)	178mm	(7.01 inches)
Approx Weight	Approx 23.1 kg (50.93 lbs)		
Terminal	M6		
Container Material	ABS		
Rated Capacity	75.0Ah / 3.75A		(20hr,10.8V,25°C/77°F)
	70.0Ah / 7.0A		(10hr,10.8V,25°C/77°F)
	64.0Ah / 12.8A		(5hr,10.5V,25°C/77°F)
	49.6Ah / 49.6A		(1hr,9.6V,25°C/77°F)
Max. Discharge Current	700A (5s)(**25°C/77°F)**		
Internal Resistance	Fully charged battery(25°C/77°F)Approx 6.6mΩ		
Operating Temp.Range	Discharge : -15～50°C (5～122°F)		
	Charge : -20～40°C (-4～104°F)		
	Storage : -15～40°C (5～104°F)		
Nominal Operating Temp. Range	25±3°C (77±5°F)		
Cycle Use	Initial Charging Current less than 21.0A.Voltage 14.4V~15.0V at 25°C(77°F)Temp. Coefficient -30mV/°C		
Standby Use	Initial Charging Current less than 21.0A.Voltage 13.5V~13.8V at 25°C(77°F)Temp. Coefficient -20V/°C		
Self Discharge	CT series batteries may be stored for up to 6 months at 25°C(77°F) and then a freshening charge is required. For higher temperatures the time intervall will be shorter.		

Applications

- *Emergency backup power supply*
- *Emergency light*
- *Railway signal*
- *Aircraft signal*
- *Alarm and security system Electronic*
- *apparatus and equipment*
- *Communication power supply*
- *DC power supply*
- *Auto control system*

Dimensions

M6 Terminal

Unit: mm

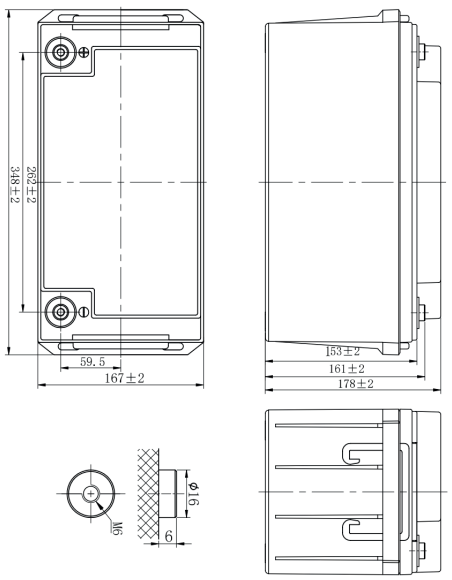

Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	5min	10min	15min	30min	1h	3h	5h	10h	20h
1.60V/cell	...	221.6	159.8	95.0	49.6	21.2	14.0	7.83	4.13
1.67V/cell	...	204.1	149.4	90.0	47.9	20.6	13.5	7.67	4.06
1.70V/cell	...	189.1	140.5	85.3	46.3	19.8	13.2	7.46	3.94
1.75V/cell	...	173.5	131.6	81.9	44.9	19.2	12.8	7.19	3.84
1.80V/cell	...	157.9	120.5	78.9	42.9	18.9	12.5	7.00	3.75

Constant Power Discharge (Watts/cell) at 25 °C (77°F)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h
1.60V/cell	...	381.1	282.7	175.0	119.0	94.2	63.4	41.0	27.2
1.67V/cell	...	359.1	268.8	167.0	114.8	91.4	61.6	39.9	26.5
1.70V/cell	...	335.8	254.7	159.6	113.0	89.1	60.3	38.5	25.8
1.75V/cell	...	315.2	241.9	154.2	109.0	86.6	58.1	37.5	25.2
1.80V/cell	...	291.5	224.2	149.7	106.1	83.2	56.2	37.0	24.7

CELLTECH ABATEL AB Allmänningsvägen 81, 176 76 Järfälla, Sweden
TELEFON +46 84 45 78 70
E-POST info@celltech.se WEB www.celltech.se

Discharge Characteristics

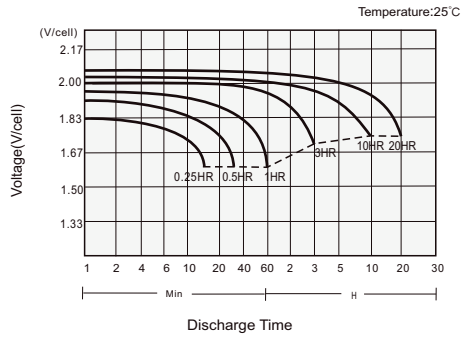

Charging Characteristics

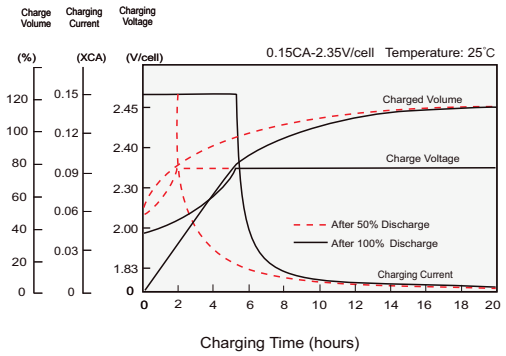

Effects of Temperature on Capacity

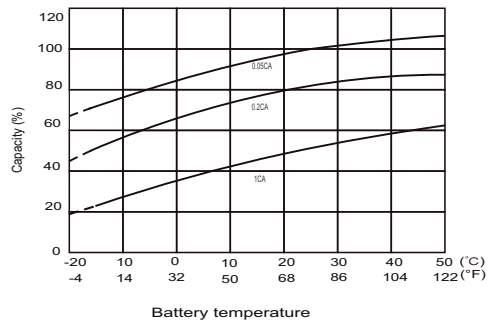

Self Discharge Characteristics

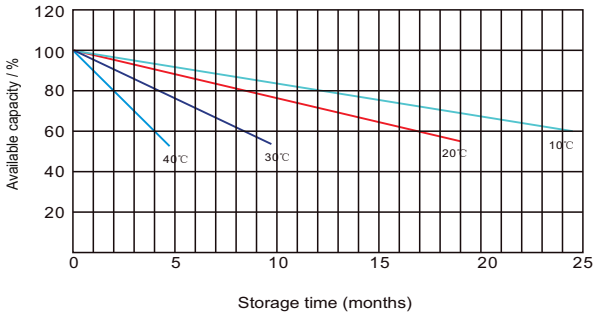

General diagrams

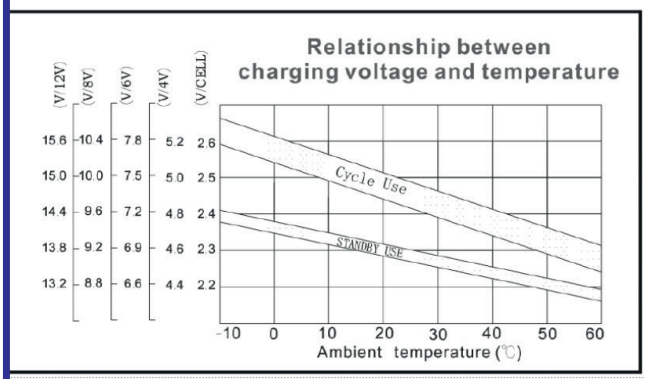

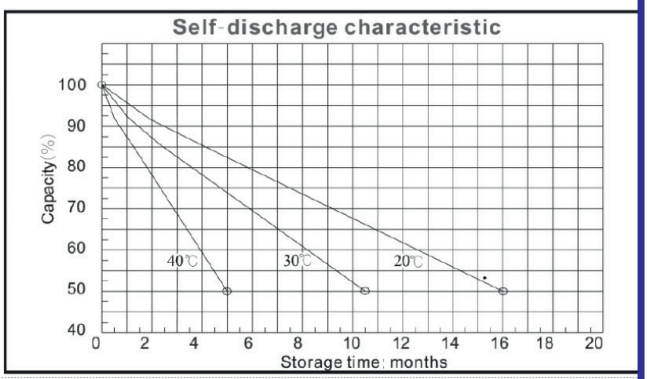

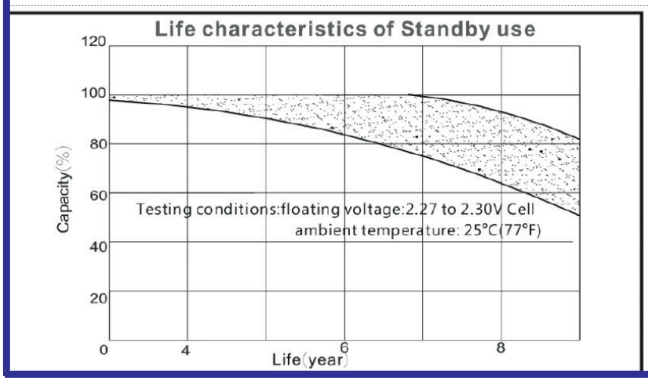

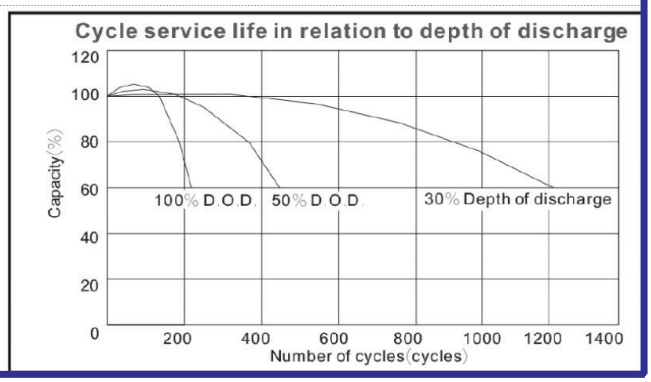

CELLTECH ABATEL AB Allmänningsvägen 81, 176 76 Järfälla, Sweden
TELEFON +46 84 45 78 70
E-POST info@celltech.se WEB www.celltech.se